


Gasket 90° Die Stamped Saddle Tap with Damper (GDSTD)

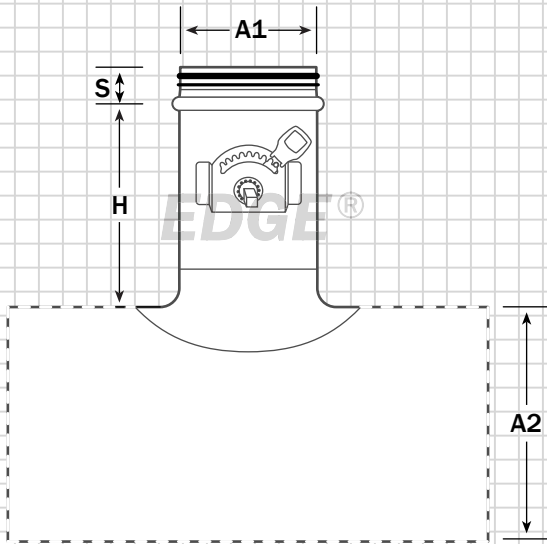

* Field installed fitting

Key (GDSTD)

- A1 = 4", 5", 6", 8", 10", 12"
- A2 = Up to 24" (A2 is greater than or equal to A1)
- S = 2"
- H = 7 - 1/2" (for 4")
- 7 - 3/8" (for 5")
- 8 - 1/4" (for 6")
- 8 - 1/2" (for 8", 10" & 12")

Features

- 22 Gauge galvanized body

Low-Leakage Dampers

- 2" Stand-off (20 ga.)
- Nylon bushings with O-ring for sealing of holes
- Locking handle for adjustment of damper - ease of balancing
- 3/8" Continuous square rod through damper
- 4"- 22" Standard dampers (22 ga.)
- 24"- 36" Standard dampers (20 ga.)