


The **EDGE**[®] – Product Specifications

Gasket Bellmouth Take-off (GBT0)

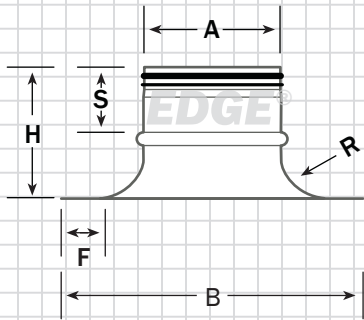

Dimensions (GBT0)

A	B	R	F	H	S
4"	7"	.394"	1"	2.25"	2"
5"	8"	.472"	1"	2.25"	2"
6"	9.25"	.787"	1"	2.625"	2"
7"	10.5"	1.0"	1"	3.25"	2"
8"	12"	1.0"	1"	2.75"	2"
9"	13"	1.0"	1"	3.25"	2"
10"	13.625"	1.0"	1"	2.75"	2"
12"	15.625"	1.0"	1"	2.75"	2"
14"	17"	2.0"	1"	6"	2"
16"	20"	2.0"	1.5"	8"	2"
18"	22"	2.0"	1.5"	8"	2"
20"	24"	2.0"	1.5"	8"	2"
22"	26"	2.0"	1.5"	8"	2"
24"	28"	2.0"	1.5"	8"	2"
26"	30"	2.0"	1.5"	8"	2"
28"	32"	2.0"	1.5"	8"	2"
30"	34"	2.0"	1.5"	8"	2"
32"	36"	2.0"	1.5"	8"	2"
34"	38"	2.0"	1.5"	8"	2"
36"	40"	2.0"	1.5"	8"	2"

Key

A = Diameter	B = Overall width
R = Radius	H = Overall height
F = Flange length	S = Bead to end

Materials Available

- Galvanized (4" - 12"), 24 ga., stamped
- Galvanized (14" - 36"), 20 ga., spun

Options Available

- Sizes 4" - 36"
- Dampers (see GBTOD spec)