


**90° Tee with Damper (TD)**

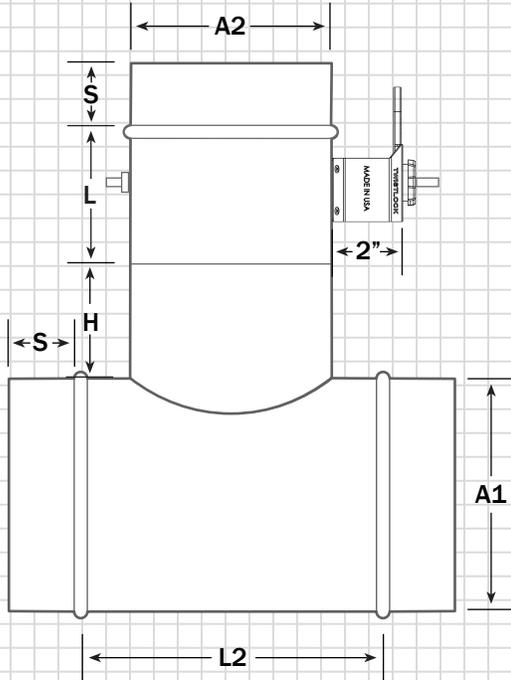

**Key (TD)**

**Sizes Available for A1 & A2:**  
 4" - 10" (all sizes), 12" - 60" (even sizes only)  
**A1 is greater than or equal to A2**  
 S = 2"  
 H = 4"  
 L = 3.5"  
 L2 = A2 + 4"


**Key (SRTD)**

**Sizes Available for A1, A2 & A3:**  
 4" - 10" (all sizes), 12" - 60" (even sizes only)  
**A1 is greater than A3, A2 is less than A1**  
 S = 2"  
 H = 4"  
 L = 3.5"  
 L2 = A3 + 4"  
 X = A1 - A2 (4" minimum)

**Gauge**

4" - 24" = 24 ga.  
 26" - 36" = 22 ga.

**90° Straight Reducing Tee with Damper (SRTD)**

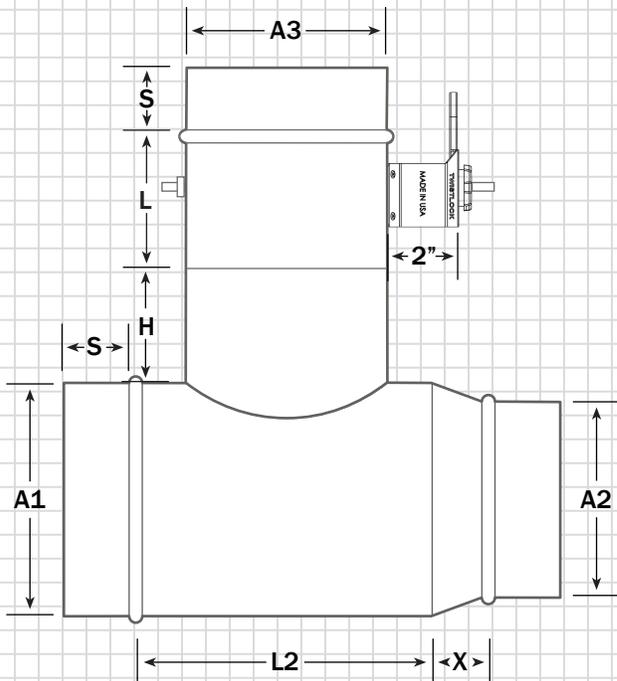

**Low-Leakage Dampers:**

- 2" Stand-off
- Nylon bushings
- Locking handle
- 3/8" Continuous square rod
- All dampers to be installed 90° from the inlet of airflow

