


45° Lateral Tee with Damper (LTD)

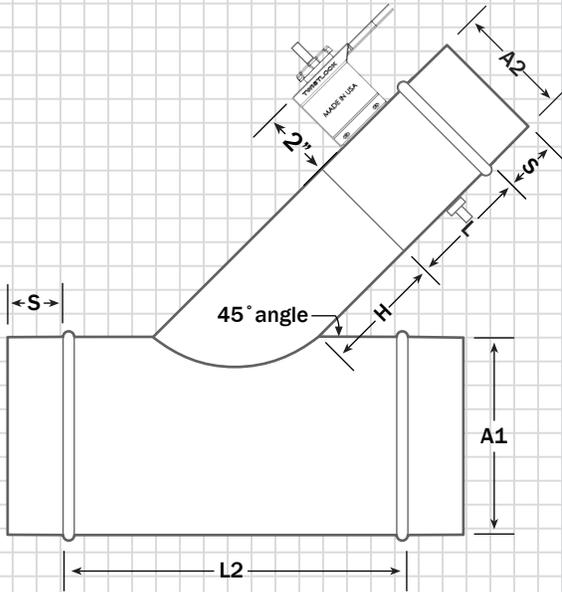

Key (LTD)

Sizes Available for A1 & A2:
 4" - 10" (all sizes), 12" - 60" (even sizes only)
A1 is greater than or equal to A2
S = 2"
H = 4"
L = 3.5"
L2 = (A2 x 1.414) + 4"


Key (LRTD)

Sizes Available for A1, A2 & A3:
 4" - 10" (all sizes), 12" - 60" (even sizes only)
A1 is greater than or equal to A3
A2 is less than A1
S = 2"
H = 4"
L = 3.5"
L2 = (A3 x 1.414) + 4"
X = A1 - A2 (4" minimum)

Gauge

4" - 24" = 24 ga.
 26" - 36" = 22 ga.

45° Lateral Reducing Tee with Damper (LRTD)

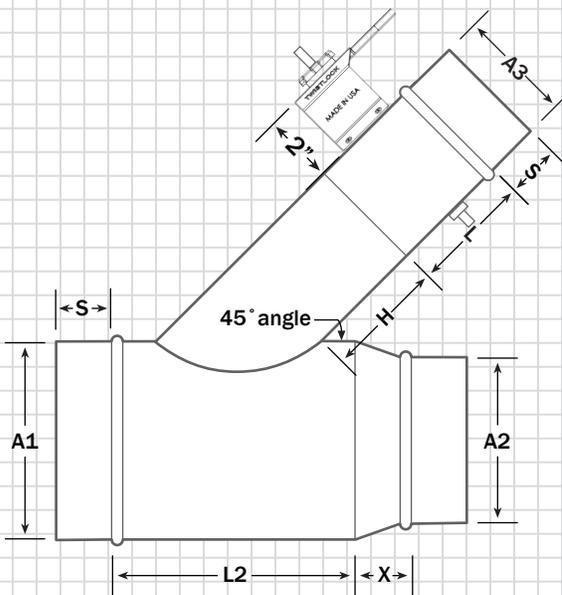

Low-Leakage Dampers:

- 2" Stand-off
- Nylon bushings
- Locking handle
- 3/8" Continuous square rod
- All dampers to be installed 90° from the inlet of airflow

