



Gasket Bellmouth Take-off (GBT0)

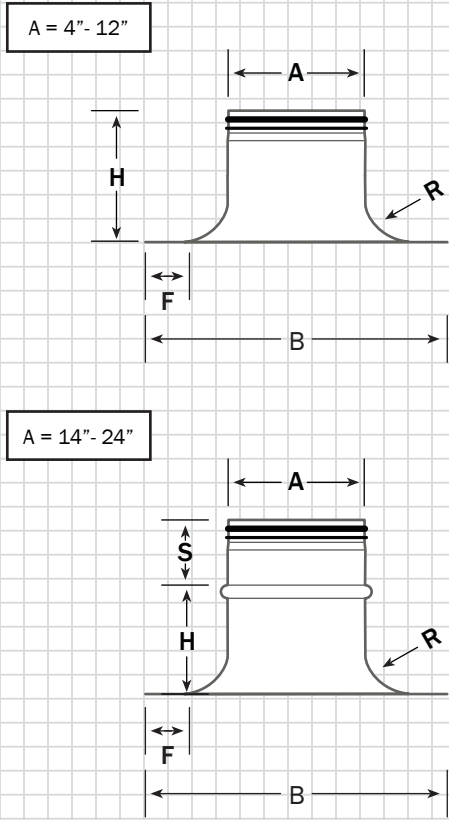


Gasket Bellmouth Take-off with Damper (GBTOD)

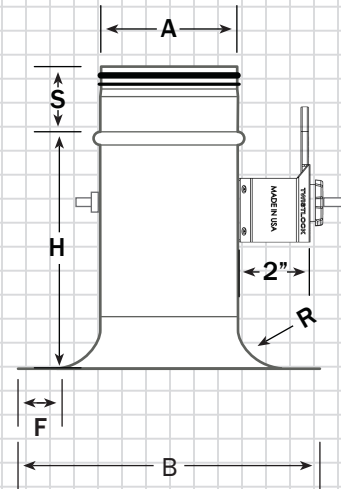

Low-Leakage Dampers:

- 2" Stand-off
- Nylon bushings
- Locking handle
- 3/8" Continuous square rod
- All dampers to be installed 90° from the inlet of airflow



Dimensions							
A	B	S (GBT0)	S (GBTOD)	R	F	H (GBT0)	H (GBTOD)
4"	7"	N/A	2"	.394"	1"	2.25"	5.75"
5"	8"	N/A	2"	.472"	1"	2.25"	5.75"
6"	9.25"	N/A	2"	.787"	1"	2.625"	6"
7"	10.5"	N/A	2"	1.0"	1"	3.25"	6.75"
8"	12"	N/A	2"	1.0"	1"	2.75"	6.25"
9"	13"	N/A	2"	1.0"	1"	3.25"	6.75"
10"	13.625"	N/A	2"	1.0"	1"	2.75"	6.25"
12"	15.625"	N/A	2"	1.0"	1"	3"	6.5"
14"	18"	2"	2"	2.0"	0.5"	6"	10.25"
16"	20"	2"	2"	2.0"	0.5"	8.75"	12.25"
18"	22"	2"	2"	2.0"	0.5"	8.75"	12.25"
20"	24"	2"	2"	2.0"	0.5"	8.75"	12.25"
22"	26"	2"	2"	2.0"	0.5"	8.75"	12.25"
24"	28"	2"	2"	2.0"	0.5"	8.75"	12.25"

Key	
A = Diameter	B = Overall width
R = Radius	H = Overall height
F = Flange length	S = Bead to end
Materials	
<ul style="list-style-type: none"> • Galvanized (4" - 12"), 24 ga., stamped • Galvanized (14" - 24"), 20 ga., spun 	