


Stamped Reducer (SR)




Key (SR)

- A = Small end diameter, S = 2"
- B = Large end diameter, S = 1.5"
- Galvanized 24 ga.
- Bead on large end is standard

Dimensions (SR)

| B | A | H |
|-----|-----|-------|
| 6" | 4" | 1.75" |
| 8" | 6" | 1.75" |
| 10" | 6" | 2.75" |
| 10" | 8" | 1.75" |
| 12" | 8" | 2.75" |
| 12" | 10" | 1.75" |
| 14" | 12" | 1.75" |

Concentric Reducer (CR)

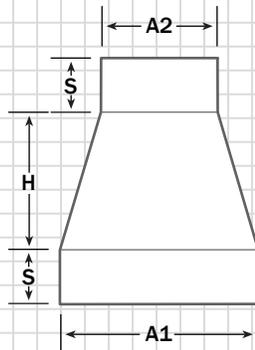


Key (CR)

- Sizes Available for A1 & A2:**
 4" - 10" (all sizes), 12" - 60" (even sizes only)
 S = 2"
 H = 4" if the change in diameter (A1 - A2) is less than 6"
 • If the change in diameter (A1 - A2) is greater than or equal to 6" then H = A1 - A2.
 • Please specify any other length, if not the standard.

Key (ER)

- Sizes Available for A1 & A2:**
 4" - 10" (all sizes), 12" - 60" (even sizes only)
 S = 2"
 H = (A1 - A2) x 2
 • H minimum = 7- 3/4"
 • Please specify any other length, if not the standard.

Eccentric Reducer (ER)

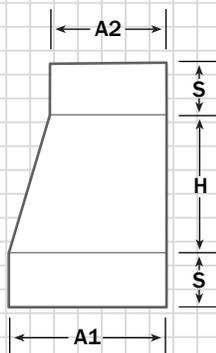

Gauge

- 4" - 24" = 24 ga.
- 26" - 36" = 22 ga.