


Conical Take-off (CTO)

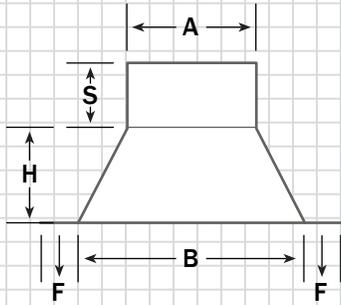

Key (CTO)

- A = 4" - 10" (all sizes), 12" - 60" (even sizes only)
- B = A + 1.5"
- S = 2.5"
- H = 3 - 3/4"
- F = 3/4" flange (.75")


Key (CTOD)

- A = 4" - 10" (all sizes), 12" - 60" (even sizes only)
- B = A + 1.5"
- S = 2"
- L = 3.5"
- H = 3 - 3/4"
- F = 3/4" flange (.75")

Gauge


- 4" - 24" = 24 ga.
- 26" - 36" = 22 ga.

Conical Take-off with Damper (CTOD)

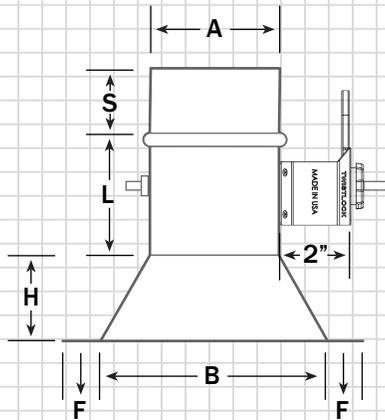

Low-Leakage Dampers:

- 2" Stand-off
- Nylon bushings
- Locking handle
- 3/8" Continuous square rod
- All dampers to be installed 90° from the inlet of airflow



Front View