


**Gasket Pipe Coupling (GPC)**




**Key (GPC)**

A = 4" - 10" (all sizes), 12" - 60" (even sizes only)  
 S = 2"  
 L = 4"

**Gauge**

4" - 24" = 24 ga.  
 26" - 36" = 22 ga.

**Gasket Damper (GD)**



**Key (GD)**


A = 4" - 10" (all sizes), 12" - 60" (even sizes only)  
 S = 2"  
 L = 4.25"

**Gauge**


4" - 24" = 24 ga.  
 26" - 36" = 22 ga.

**Low-Leakage Dampers:**

- 2" Stand-off
- Nylon bushings
- Locking handle
- 3/8" Continuous square rod
- All dampers to be installed 90° from the inlet of airflow



**Fitting Coupling (FC)**

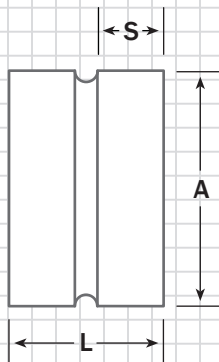

**Key (FC)**

A = 4" - 10" (all sizes), 12" - 60" (even sizes only)  
 S = 2"  
 L = 4.75"

\* This product is pipe size for use with fitting to fitting application.

**Gauge**

4" - 24" = 24 ga.  
 26" - 36" = 22 ga.