


Coupling (CM/CF)

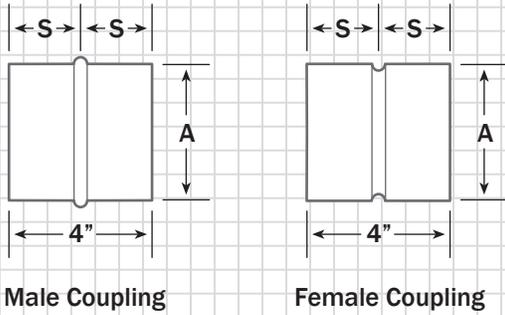

Key (CM/CF)

A = 3" - 60"
S = 2"

Stitch welded construction


Male Coupling - For pipe, the ends are 1/8" undersize to fit inside spiral pipe. Bead is located at 2".

Female Coupling - For pipe, the ends are 1/8" oversize to fit over spiral pipe. Reverse bead is located at 2".

Gauge

4" - 24" = 24 ga.
26" - 36" = 22 ga.

End Plug (EP)



Key (EP)

A = Small end to fit in spiral pipe
S = 2.75"

Gauge

4" - 24" = 24 ga.
26" - 36" = 22 ga.