



Conical Cross with Damper (CROSCD)

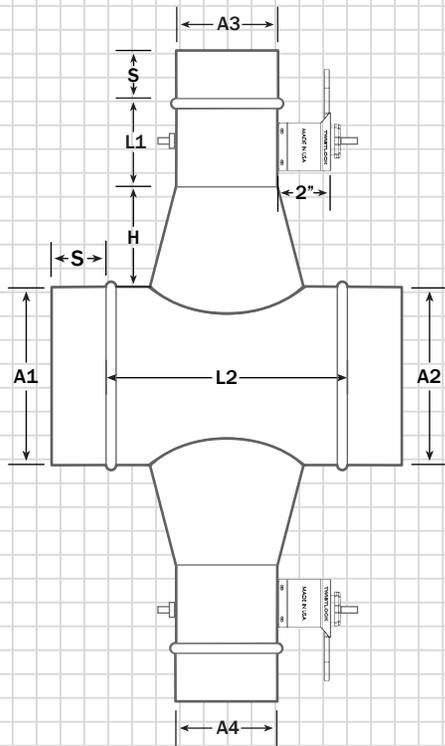

Straight Cross with Damper (CROSSD)

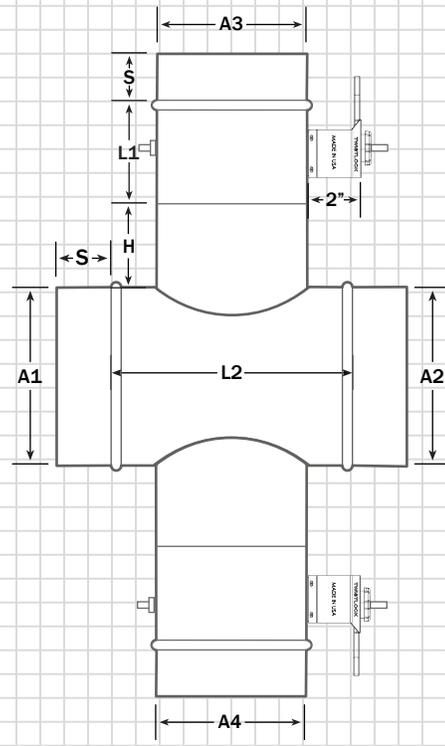

Key (CROSCD)

Sizes Available for A1, A2, A3 & A4:
 4" - 10" (all sizes), 12" - 60" (even sizes only)
 A1 & A2 is greater than A3 & A4 (= 2" min.)
 A3 is greater than or equal to A4
 S = 2"
 H = 5"
 L1 = 3.5", L2 = A3 + 4"

Key (CROSSD)

Sizes Available for A1, A2, A3 & A4:
 4" - 10" (all sizes), 12" - 60" (even sizes only)
 A1 & A2 is greater than or equal to A3 & A4
 A3 is greater than or equal to A4
 S = 2"
 H = 4"
 L1 = 3.5", L2 = A3 + 4"


Key (CROSLD)

Sizes Available for A1, A2, A3 & A4:
 4" - 10" (all sizes), 12" - 60" (even sizes only)
 A1 & A2 is greater than or equal to A3 & A4
 A3 is greater than or equal to A4
 S = 2"
 H = 4"
 L1 = 3.5", L2 = (A3 x 1.414) + 4"

Gauge

4" - 24" = 24 ga.
 26" - 36" = 22 ga.

45° Lateral Cross with Damper (CROSLD)

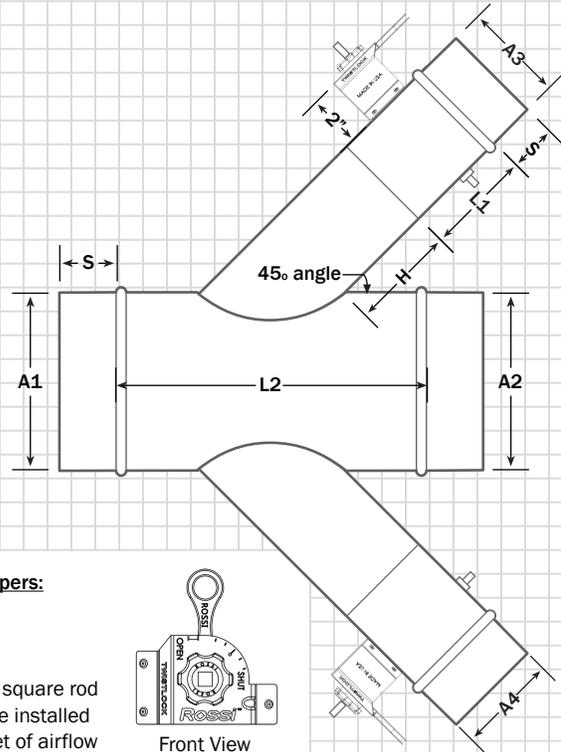

Low-Leakage Dampers:

- 2" Stand-off
- Nylon bushings
- Locking handle
- 3/8" Continuous square rod
- All dampers to be installed 90° from the inlet of airflow

