



**90° Die Stamped Saddle Tap  
Bead (DSTB)  
No Bead (DSTNB)**

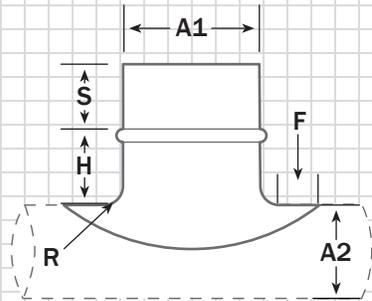

**90° Die Stamped Saddle Tap with  
Damper (DSTDC6 / DSTD2S)**

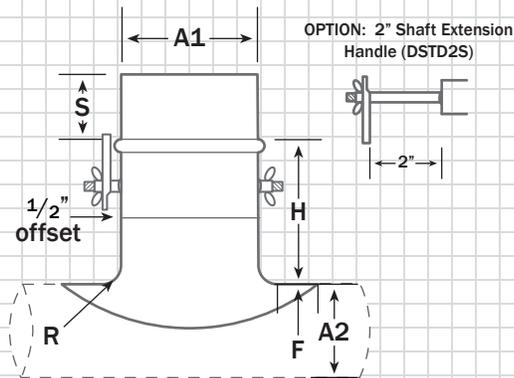

**Dimensions**

A1	A2	S (DSTB, DSTNB)	S (DSTDC6, DSTD2S, DSTD)	R	F	H (DSTB, DSTNB)	H (DSTDC6, DSTD2S, DSTD)
4"	4"	1.125"	2"	0.787"	1"	1"	5.75"
4"	5"	1.125"	2"	0.787"	1"	1"	5.75"
4"	6" - 7"	1.125"	2"	0.787"	1"	1"	5.75"
4"	8"	1.125"	2"	0.787"	1"	1"	5.75"
4"	9" - 10"	1.125"	2"	0.787"	1"	1"	5.75"
4"	12" - 14"	1.125"	2"	0.787"	1"	1"	5.75"
4"	16" - 24"	1.125"	2"	0.787"	1"	1"	5.75"
5"	5"	1.25"	2"	0.787"	1"	1"	5.625"
5"	6" - 7"	1.25"	2"	0.787"	1"	1"	5.625"
5"	8" - 9"	1.25"	2"	0.787"	1"	1"	5.625"
5"	10"	1.25"	2"	0.787"	1"	1"	5.625"
5"	12" - 14"	1.25"	2"	0.787"	1"	1"	5.625"
5"	16" - 24"	1.25"	2"	0.787"	1"	1"	5.625"
6"	6"	1.5"	2"	0.787"	1"	1.125"	6.125"
6"	8"	1.5"	2"	0.787"	1"	1.75"	6.75"
6"	10" - 12"	1.5"	2"	0.787"	1"	1.75"	6.75"
6"	14" - 18"	1.5"	2"	0.787"	1"	1.75"	6.75"
6"	20" - 24"	1.5"	2"	0.787"	1"	1.75"	6.75"
8"	8"	1.5"	2"	1"	1"	1"	6"
8"	10"	1.5"	2"	1"	1"	1.75"	6.75"
8"	12" - 14"	1.5"	2"	1"	1"	1.75"	6.75"
8"	16" - 18"	1.5"	2"	1"	1"	1.75"	6.75"
8"	20" - 24"	1.5"	2"	1"	1"	1.75"	6.75"
10"	10"	1.5"	2"	1"	2"	1.125"	6.125"
10"	12"	1.5"	2"	1"	2"	2"	6.75"
10"	14" - 16"	1.5"	2"	1"	2"	2"	6.75"
10"	18" - 20"	1.5"	2"	1"	2"	2"	6.75"
10"	22" - 24"	1.5"	2"	1"	2"	2"	6.75"
12"	12"	1.5"	2"	1"	2"	1.125"	6.25"
12"	14" - 16"	1.5"	2"	1"	2"	2"	6.75"
12"	18" - 20"	1.5"	2"	1"	2"	2"	6.75"
12"	22" - 24"	1.5"	2"	1"	2"	2"	6.75"

**Key**

**A1** = Branch (nominal) size      **H** = Height  
**A2** = Pipe (nominal) size        **R** = Radius  
**F** = Flange on pipe

**Options Available**

- 2" Stand-offs, DSTD26 (see shaft extension handle drawing above)

**Gauge**

- Galvanized, 24 ga.