


90° Conical Tee with Damper (CTD)

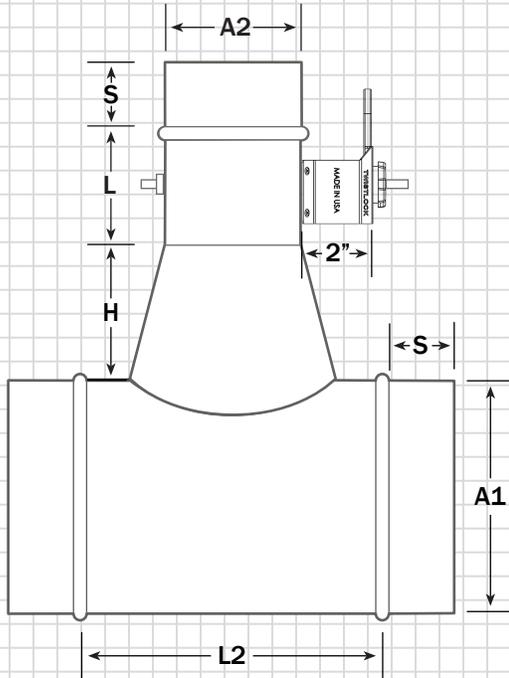

Key (CTD)

Sizes Available for A1 & A2:
 4" - 10" (all sizes), 12" - 60" (even sizes only)
 A1 is greater than A2
 S = 2"
 H = 5"
 L = 3.5"
 L2 = A2 + 4"

Key (CRTD)


Sizes Available for A1, A2 & A3:
 4" - 10" (all sizes), 12" - 60" (even sizes only)
 A1 is greater than A3, A2 is less than A1
 S = 2"
 H = 5"
 L = 3.5"
 L2 = A3 + 4"
 X = A1 - A2 (4" minimum)

Gauge

4" - 24" = 24 ga.
 26" - 36" = 22 ga.

Low-Leakage Dampers:

- 2" Stand-off
- Nylon bushings
- Locking handle
- 3/8" Continuous square rod
- All dampers to be installed 90° from the inlet of airflow



Front View

90° Conical Reducing Tee with Damper (CRTD)

