




Straight Tap (ST)



90° Straight Tap with Damper (STD)

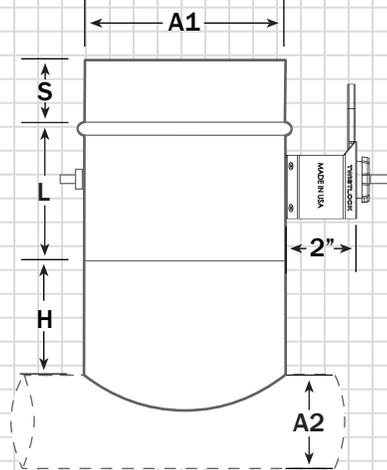

90° Tee (T)

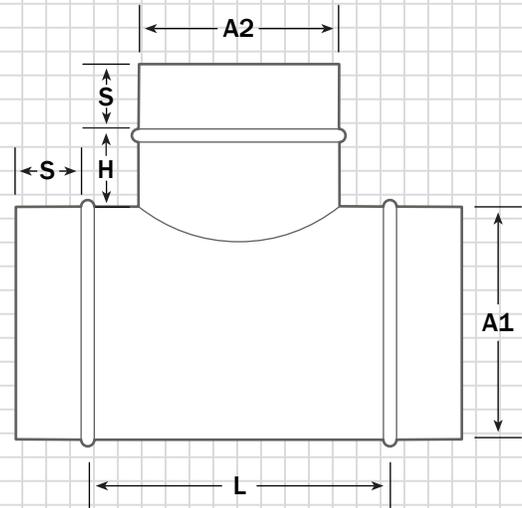

Key (ST)

Sizes Available for A1:
 4"- 10" (all sizes), 12"- 60" (even sizes only)
A2 is greater than or equal to **A1**
S = 2"
H = 2"

Key (STD)

Sizes Available for A1:
 4"- 10" (all sizes), 12"- 60" (even sizes only)
A2 is greater than **A1**
S = 2"
H = 4"
L = 3.5"

Key (T)

Sizes Available for A1 & A2:
 4"- 10" (all sizes), 12"- 60" (even sizes only)
A1 is greater than or equal to **A2**
S = 2"
H = 2"
L = $A2 + 4$ "


Key (SRT)

Sizes Available for A1, A2 & A3:
 4"- 10" (all sizes), 12"- 60" (even sizes only)
A1 is greater than **A3**, **A2** is less than **A1**
S = 2"
H = 2"
L = $A3 + 4$ "
X = $A1 - A2$ (4" minimum)

Gauge

4"- 24" = 24 ga.
 26"- 36" = 22 ga.

90° Straight Reducing Tee (SRT)

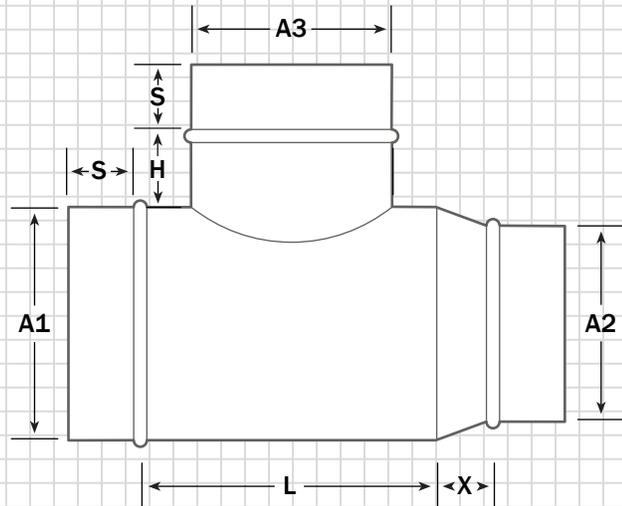

Low-Leakage Dampers:

- 2" Stand-off
- Nylon bushings
- Locking handle
- 3/8" Continuous square rod
- All dampers to be installed 90° from the inlet of airflow

