


# Stamped Fittings® – Product Specifications

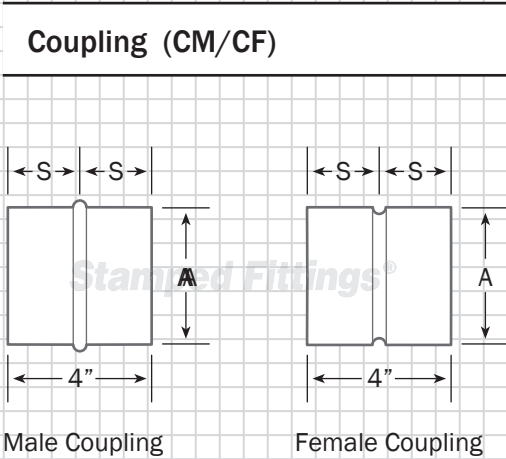

Dimensions		
(A)	(S)	Weight Each
3"	2"	0.8#
4"	2"	1.0#
5"	2"	1.3#
6"	2"	1.5#
7"	2"	1.7#
8"	2"	2.0#
9"	2"	2.2#
10"	2"	2.5#
12"	2"	3.0#
14"	2"	3.5#
16"	2"	3.9#
18"	2"	4.5#
20"	2"	4.9#
22"	2"	5.7#
24"	2"	6.7#
26"- 36"	2"	N/A

**Key**

A = Diameter  
S = 2"

- 4" overall length is standard
- Stitch welded construction

Male Coupling – For pipe, the ends are 1/8" undersize to fit inside spiral pipe. Bead is located at 2".

Female Coupling – For pipe, the ends are 1/8" oversize to fit over spiral pipe. Reverse bead located at 2".

**Materials Available**

- Galvanized - 22 ga