


Stamped Fittings® – Product Specifications

Balancing Damper Section (D)

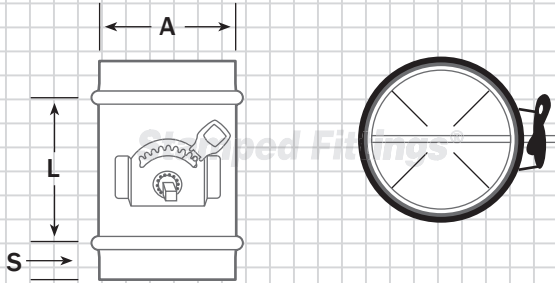

Key

A = 4" - 10" (all sizes), 12" - 36" (even sizes only)
S = 2"
L = 4"


Materials Available

- Galvanized (22 ga.)
- Galvaneal

Low-Leakage Dampers

- 2" Stand-off
- Nylon bushings
- Locking handle for adjustment of damper - ease of balancing
- 3/8" Continuous square rod through damper

Balancing Damper Section - Large End/Small End (D1)

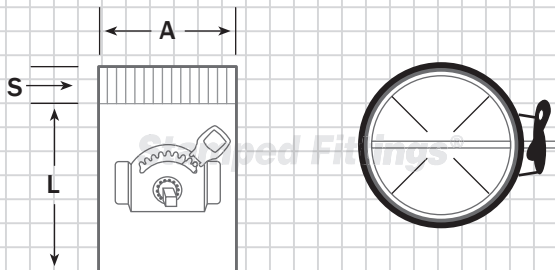

Key

A = 4" - 10" (all sizes), 12" - 36" (even sizes only)
S = 2"
L = 6"

Materials Available

- Galvanized (22 ga.)
- Galvaneal

Low-Leakage Dampers

- 2" Stand-off
- Nylon bushings
- Locking handle for adjustment of damper - ease of balancing
- 3/8" Continuous square rod through damper